

# AXC (METAL)

## High performance in-line fans

The AXC Metal in-line fan range is available in 10 sizes and is suitable for ducted systems in commercial, industrial, and large residential applications.

With their high-performance centrifugal motors, the AXC Metal range moves large volumes of air working with up to 20m of ducting – perfect for servicing multiple rooms.



### MANUFACTURER:



### WARRANTY:

2 years

### APPLICATIONS AND INSTALLATION:

- To be used in conjunction with internal grilles and ducting (not included)
- Works with long ducting lengths (up to 20m)\*
- Suitable for multiple room applications including:
  - Bathrooms
  - Laundries
  - Kitchens and rangehoods
  - Garbage exhaust
  - Supply air systems
- It is recommended that this product be installed by an industry professional (electrician or air-conditioning installer)

\*Correctly sized ducting




### BENEFITS:

- Backward curved blades to ensure quiet operation and develop ample static pressure
- Ideal solution for centralised / multi-point ventilation systems
- Ideal for moving medium to large air volumes against higher static resistance
- Can be used with long lengths of rigid or flexible ducting
- Variable speed control
- Heavy gauge, spun steel housing with baked epoxy finish
- Ball bearing motor, permanently lubricated for maintenance free operation and continuous running
- Available in 10 sizes

# AXC METAL

High performance in-line fans

## APPLICATIONS:

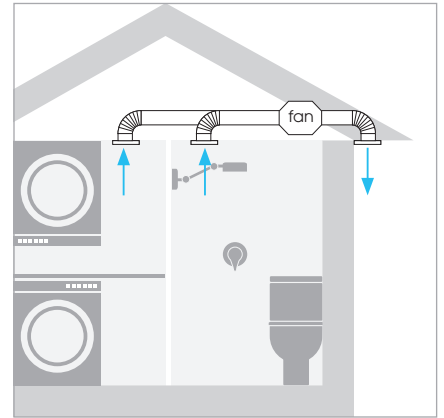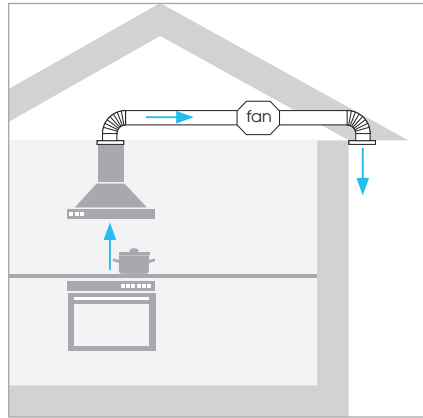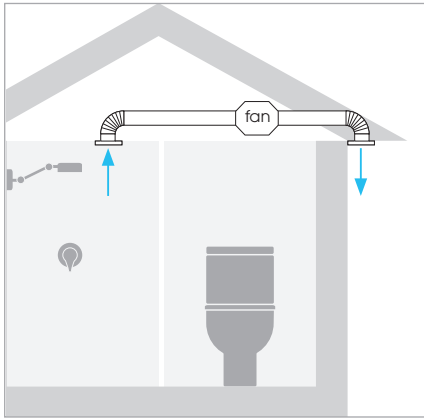


## SPECIFICATIONS:

Model	Item Code	Volume m <sup>3</sup> /h (maximum)	Volume L/s (maximum)	Pressure (maximum)	Wattage	Amps	Noise dB(A) *	RPM
AXC 100 A	2AX1000	195	54	350	70	0.3	40	1990
AXC 100 B	2AX1001	250	69	380	70	0.3	45	2530
AXC 125 A	2AX1250	245	68	310	70	0.34	42	1700
AXC 125 B	2AX1251	325	90	340	70	0.30	45	2400
AXC 150 A	2AX1500	400	111	310	70	0.30	46	2470
AXC 150 B	2AX1503	530	147	420	80	0.40	45	2450
AXC 160 A	2AX1600	440	122	330	70	0.30	46	2395
AXC 160 B	2AX1603	700	194	420	110	0.50	47	2550
AXC 200 A	2AX2000	750	208	350	80	0.40	50	2450
AXC 200 B	2AX2001	980	272	580	150	0.70	50	2700
AXC 250	2AX2500	1120	311	570	170	0.78	53	2550
AXC 315 A	2AX3150	1400	389	580	150	0.80	54	2645
AXC 315 B	2AX3153	1850	514	700	300	1.30	59	2630
AXC 355 A	2AX3550	2200	611	349	240	1.12	57	1330
AXC 355 B	2AX3552	2350	653	902	650	2.82	77	2560

\* Measured at 3 metres

## DIMENSIONS:

Model Item	A	B	C	ØD	Ød	E	Kg
AXC 100 A & B	12	215	24	245	98	38	3
AXC 125 A & B	11	214	24	245	122	38	3
AXC 150 A	21	216	23	245	147	38	3
AXC 150 B	22	230	22	333	148	38	5
AXC 160 A	24	215	24	245	157	38	3
AXC 160 B	21	230	22	333	158	38	5
AXC 200 A & B	22	230	27	333	198	38	5
AXC 250	22	230	35	333	248	38	5
AXC 315 A & B	30	308	52	404	314	38	9
AXC 305 A & B	44	400	50	484	355	38	14

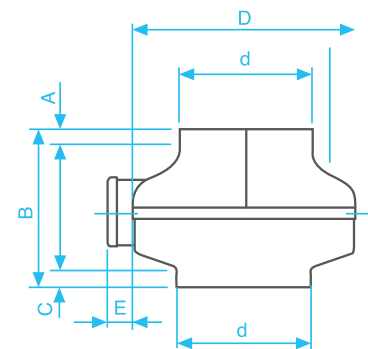

# AXC METAL RANGE

## High performance in-line fans

### PERFORMANCE:

