

E-STYLE MHT

Wall / ceiling fan with
built in humidity sensor

The E-Style fan is used for wall or ceiling mounting. Its slimline design means when installed it sits almost flush with the wall or ceiling. Designed and made in Italy, this fan has a low noise level and is perfect for domestic and small commercial applications.

This E-Style model uses advanced European technology to automatically activate the fan when the humidity reaches a pre-set level. This model also has a built-in run on timer which allows the fan to continue running for a set time after the switch is turned off.



MANUFACTURER:



WARRANTY:

2 years

INSTALLATION:

- Wall or ceiling mounted, use in conjunction with an external grille, and may be used with rigid or flexible ducting (not included)
- Works with short ducting lengths (up to 3m)
- Suitable for domestic or commercial single room applications including:
 - Bathrooms and powder rooms
 - Laundries
 - Portable buildings and classrooms
 - Small offices and meeting rooms
 - Utility rooms
- Installation by an industry professional (electrician or air-conditioning installer) is recommended


BENEFITS:

- Built in Humidity Sensor – adjustable from 40%-90% relative humidity
- Built in run-on timer – allows the fan to continue running for a set time after the switch is turned off
- Easy to install
- European slim line design
- Supplied with back-draught shutters to prevent air from moving back into the room
- Quiet operation – innovative impellers permit limited noise level
- Maintenance free – self lubricating sleeve bearing motor for long life & noiseless operation
- Comes in 3 sizes moving 95 – 295m³ of air per hour.


E-STYLE MHT

Wall / ceiling fan with built in humidity sensor

APPLICATIONS:

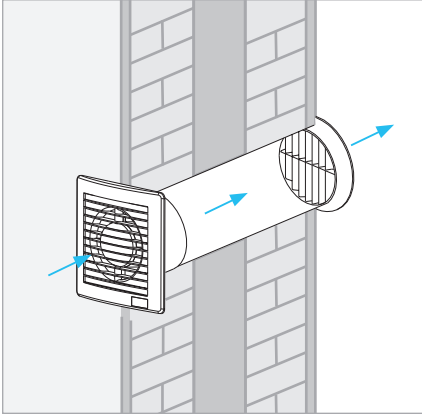

Wall

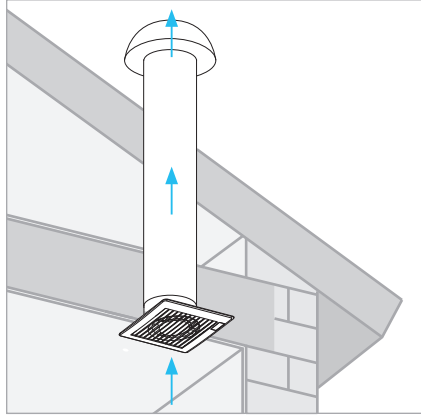

Ceiling


SPECIFICATIONS:

Model	Item Code	Volume m ³ /h (maximum)	Volume L/s (maximum)	Pressure (maximum)	Wattage	Noise dB(A)*	Protection
E-Style 100	2MU7002	95	26	40	14	31.4	IPX4
E-Style 120	2MU7202	165	46	54	15	36.7	IPX4
E-Style 150	2MU7502	295	82	71	25	43.9	IPX4

* Measured at 3 metres

DIMENSIONS:

Model	A	B	C	D	ØE	Kg
E-Style 100	160	160	95	17	98.2	0.45
E-Style 120	180	180	101	18	119	0.66
E-Style 150	200	200	119	22	149	1.04

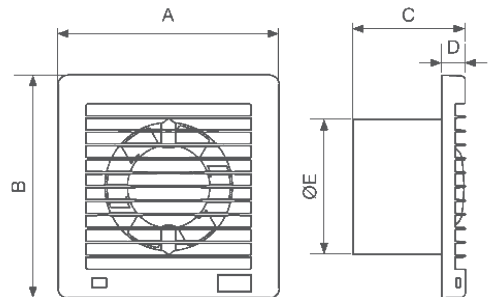

PERFORMANCE:

